

# EZMarquee - 4 Lines 20 Characters (Indoor)

## 4 Lines 20 Characters - NEMA 12

The 4 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 4 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 4 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

### Characteristics:

Character Height:	2" / 4" / 6" / 8"
Characters per Line:	20 / 10 / 6 / 5
Number of Lines:	4 / 2 / 1 / 1
Visibility:	100'/200'/300'/400'

## 4 Lines 20 Characters feature:

- 4 lines of 20 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below



RED Indoor



TRI color Indoor


Model Number	Interface	Price	Del.
<b>EZMR-4L20C</b>	RS232 and RS422/485 only	\$1,599	STK
<b>EZMR-4L20C-E</b>	Ethernet included	\$1,698	3DAY
<b>EZMR-4L20C-D</b>	DeviceNet included	\$1,698	3DAY
<b>EZMR-4L20C-P</b>	Profibus included	\$1,728	3DAY

Model Number	Interface	Price	Del.
<b>EZMT-4L20C</b>	RS232 and RS422/485 only	\$1,899	STK
<b>EZMT-4L20C-E</b>	Ethernet included	\$1,998	3DAY
<b>EZMT-4L20C-D</b>	DeviceNet included	\$1,998	3DAY
<b>EZMT-4L20C-P</b>	Profibus included	\$2,028	3DAY

### RED High-bright

Model Number	Interface	Price	Del.
<b>EZMRH-4L20C</b>	RS232 and RS422/485 only	\$3199	STK
<b>EZMRH-4L20C-E</b>	Ethernet included	\$3399	3DAY
<b>EZMRH-4L20C-D</b>	DeviceNet included	\$3399	3DAY
<b>EZMRH-4L20C-P</b>	Profibus included	\$3459	3DAY

### 4 Lines 20 Characters Dimensions

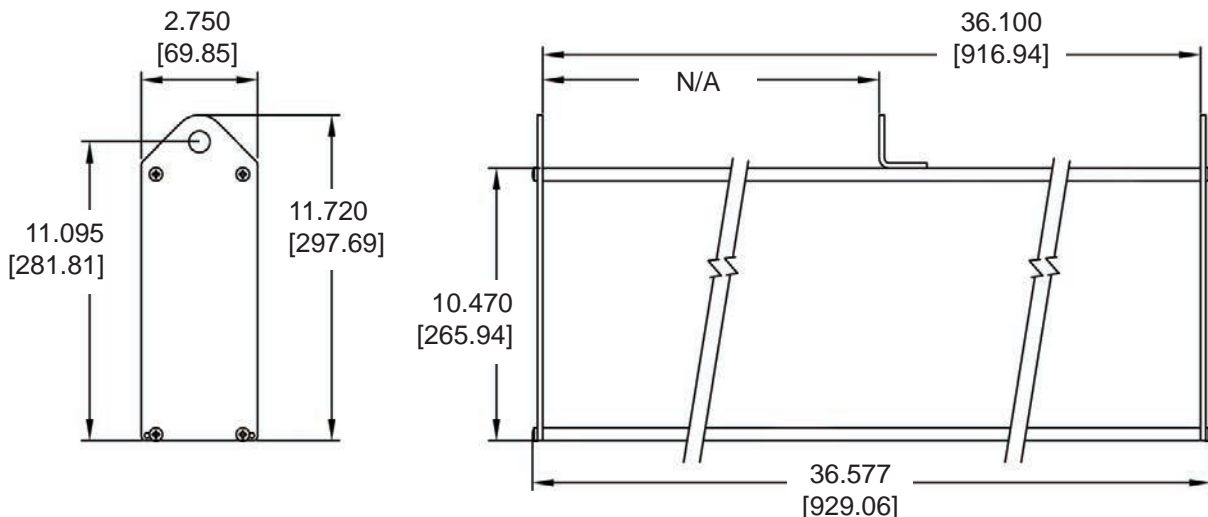



# EZMarquee 4 Line 20 Character and 4 Line 40 Character Selection Guide and Specifications (Indoor)

EZ Marquee Indoor Model Specifications					
Part Number	EZMR-4L20C \$1599 EZMR-4L20C-E \$1698 EZMR-4L20C-D \$1698 EZMR-4L20C-P \$1728 EZMRH-4L20C \$3199 EZMRH-4L20C-E \$3399 EZMRH-4L20C-D \$3399 EZMRH-4L20C-P \$3459	EZMT-4L20C \$1899 EZMT-4L20C-E \$1998 EZMT-4L20C-D \$1998 EZMT-4L20C-P \$2028	EZMR-4L40C \$2399 EZMR-4L40C-E \$2498 EZMR-4L40C-D \$2498 EZMR-4L40C-P \$2548 EZMRH-4L40C \$4799 EZMRH-4L40C-E \$4999 EZMRH-4L40C-D \$4999 EZMRH-4L40C-P \$5099	EZMT-4L40C \$3299 EZMT-4L40C-E \$3398 EZMT-4L40C-D \$3398 EZMT-4L40C-P \$3448	
Display Type for Indoor	RED LED	TRI-Color LED	RED LED	TRI-Color LED	
Display Type for "H"	RED Sunlight Readable 8000 nits		RED Sunlight Readable 8000 nits		
Specification	4 Lines of 20 Char (2")		4 Lines of 40 Char (2")		
Max. Viewable Distance	400 Feet with 8" Characters				
Power Consumption	55 watts	100 watts	100 watts	180 watts	
Agency Approvals	UL, CUL, CE, pending				
Enclosure	NEMA 12 (Indoor only)				
Operating Temperature	0° to 60° C Ambient				
Storage Temperature	-40° to 95° C Ambient				
Humidity	10% to 95% RH, Non-Condensing				
Input Power	110/220 VAC, 47-63Hz				
Electrical Interference	NEMA ICS 2-230 Showering Arc Test				
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test				
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis				
Shock	10G for under 12ms in the X, Y, and Z axis				
Serial Communications	Port 1 RS232; Port 2 RS422/485				
External Dimensions	36.577" x 11.720" x 2.750" (929.06 x 297.69 x 69.85mm)		72.450" x 11.720" x 2.750" (1840.24 x 297.69 x 69.85mm)		
Weight	15 lbs	16 lbs	30 lbs	32 lbs	