




EZPLC



**EZPLC
Snap-in I/O
EZPLCX-X-32X**

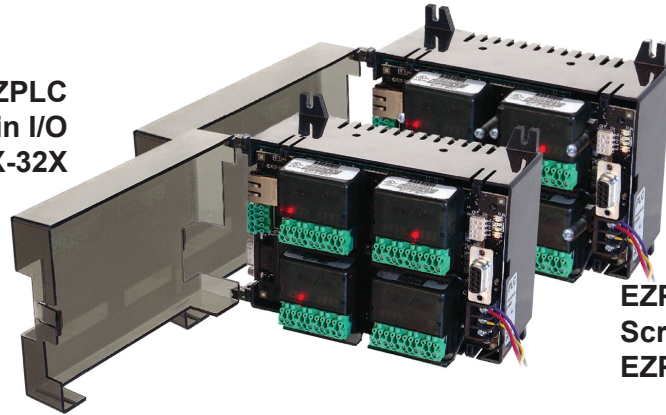

**EZPLC Plus
Screw-down I/O
EZPLCPX-X-32X**

EZPLCX-X-32 Specifications

Model Number	Interface	Price	Del.
EZPLC-A-32 EZPLCP-A-32 EZPLCJ-A-32 EZPLCPJ-A-32	AC Model – 32 I/O Base comes with RS232 port 1 and RS422/485 port 2, and a Male connector for plugging in DeviceNet or Profibus option cards. EZPLC has snap-in I/O where as EZPLCP has screw-down I/O. EZPLCJ and EZPLCPJ Junior models have only 1 RS232 port		STK
EZPLC-A-32E EZPLCP-A-32E	AC Model – 32 I/O Enhanced Ethernet Base comes with RS232 port 1, RS422/485 port 2, Ethernet port 3 and a Male connector for plugging in DeviceNet or Profibus option cards. EZPLC has snap-in I/O where as EZPLCP has screw-down I/O.		3DAY
EZPLC-D-32 EZPLCP-D-32 EZPLCJ-D-32 EZPLCPJ-D-32	DC Power – 32 I/O Base comes with RS232 port 1 and RS422/485 port 2, and a Male connector for plugging in DeviceNet or Profibus option cards. EZPLC has snap-in I/O where as EZPLCP has screw-down I/O. EZPLCJ and EZPLCPJ Junior models have only 1 RS232 port		STK
EZPLC-D-32E EZPLCP-D-32E	DC Power – 32 I/O Enhanced Ethernet Base comes with RS232 port 1, RS422/485 port 2, Ethernet port 3 and a Male connector for plugging in DeviceNet or Profibus option cards. EZPLC has snap-in I/O where as EZPLCP has screw-down I/O.		3DAY

NOTE: EZPLC Jr. has only RS232. No limitation on I/O module location except: Bottom left module cannot be AC output module * Does not apply to EZPLC Jr. port and no other connector.

